



Lighting system


Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 40 000 h (L-70)
Beam angle: 120°

Applications

Indoor places, offices
shops, hotels

Options



Dimm.: Triac
Color temp.: 5000K, 5700K
Microwave sensor and Daylight (MD)
Emergency lighting

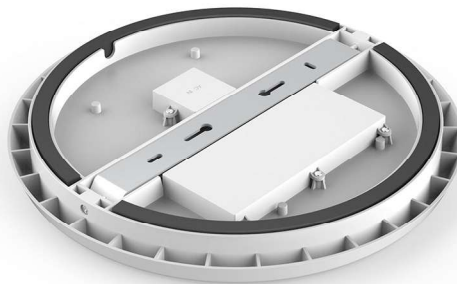


Features

Polimer body
Meets CE safety standards
Protection rating: IP54
Passive cooling

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 053	LT-UP BREEZ 12W-840	1 260	>80	12	4 000	230 AC	0,7
301 056	LT-UP BREEZ 12W-840 MS	1 260	>80	12	4 000	230 AC	0,7

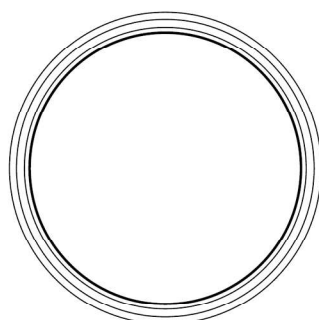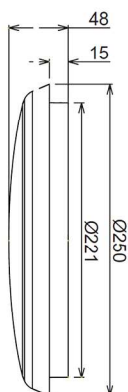

sizes

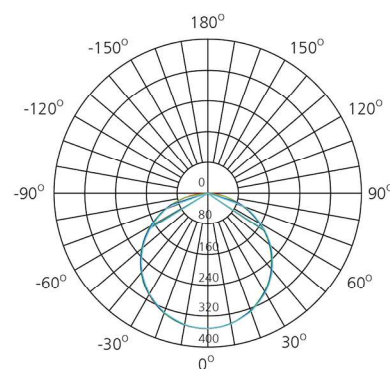

AVERAGE BEAM ANGLE (50%): 115.5 DEG

UNIT: cd

- C0/180, 115.4 deg
- C30/210, 115.7 deg
- C60/240, 115.6 deg
- C90/270, 115.3 deg