



Lighting system


Optic: Opal diffusor
SMD LED
Lifetime: 50 000 h (L-70)
Beam angle: 90°
5 years guarantee

Applications

Indoor places,
shopping centers
malls, hotels

Options


Dimm.: 1-10V, DALI
Color temp.: 3000K, 5000K

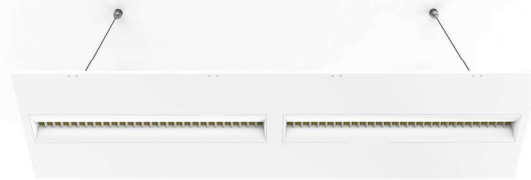


Features

Bended steel body
Meets CE safety standards
Protection rating: IP20
Passive cooling

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 184	LT-UP LUPA 12030 30W 840	3 390	>80	30	4 000	230 AC	3

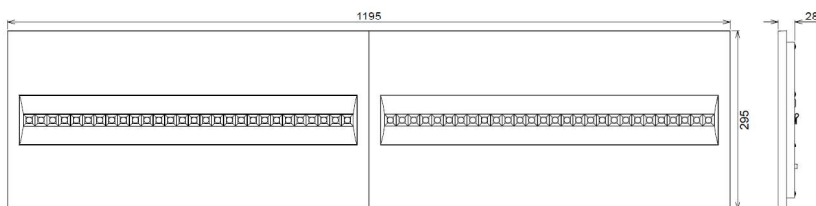

sizes

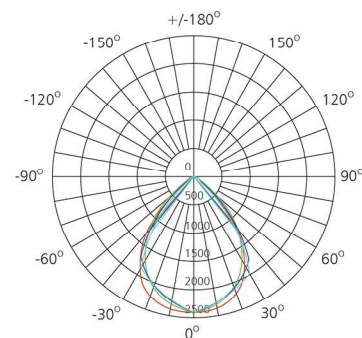

UNIT: cd
 - C0/180, 80.9 deg
 - C30/210, 80.5 deg
 - C60/240, 79.9 deg
 - C90/270, 76.1 deg

AVERAGE BEAM ANGLE (50%): 79.4DEG