



Lighting system

Optic: Opal diffuser
SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 110°
3 years guarantee

Applications


Indoor places,
offices, hotels

Features


Extruded Alu body
Meets CE safety standards
Protection rating: IP20
Passive cooling

Options

Dimm.: 1-10V, DALI
Color temp.: 3000K, 5000K

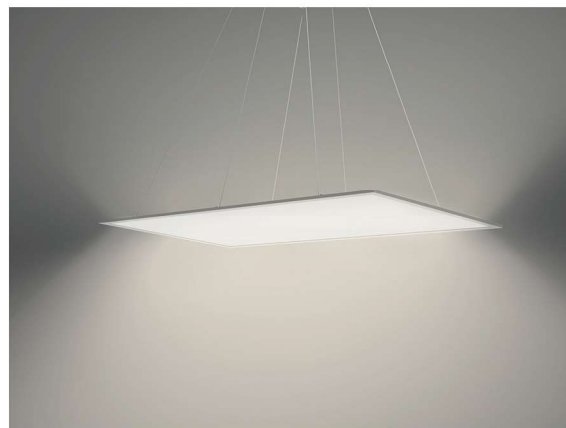

| Ordering Code | Product Name | Light Output [lm] | CRI | System Power [W] | Color Temp. [K] | Power Supply [V] | Weight [Kg] |
|---------------|---------------------------|-------------------|-----|------------------|-----------------|------------------|-------------|
| 301185 | LT-UP T-RAY 12060 72W 840 | 4 650 | >80 | 72 | 4 000 | 230 AC | 7,8 |

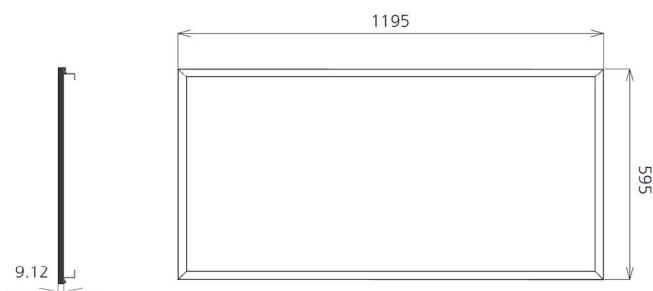

sizes

