



### Lighting system

Optic: Opal diffusor  
SMD LEDs  
Lifetime: 40 000 h (L-70)  
Beam angle: 110°  
3 years guarantee

### Applications

Indoor places,  
offices, hotels

### Features





Extruded Alu body  
Meets CE safety standards  
Protection rating: IP20  
Passive cooling

### Options


Dimm.: 1-10V, DALI  
Color temp.: 3000K, 5000K



Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 187	LT-UP BASY 60/20W 840	2 060	>80	20	4 000	230 AC	0,78
301 186	LT-UP BASY 120/40W 840	3 960	>80	40	4 000	230 AC	1,5

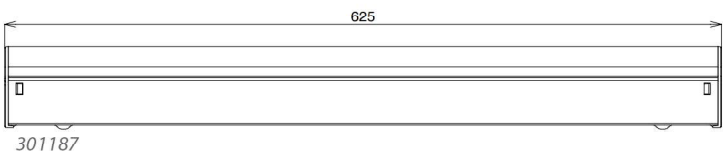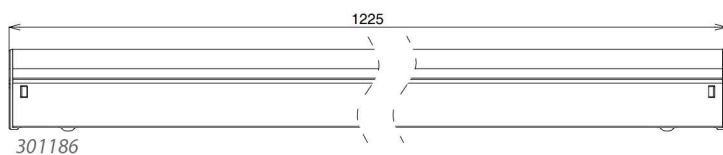

sizes

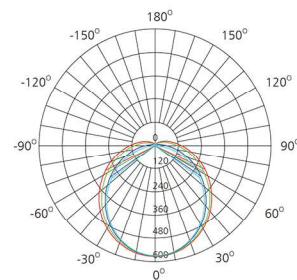

**UNIT: cd**

- C0/180, 127.5 deg
- C30/210, 121.6 deg
- C60/240, 110.9 deg
- C90/270, 106.7 deg

AVERAGE BEAM ANGLE (50%): 116.7DEG