



### Lighting system

Optic: Opal diffusor  
SMD LEDs  
Lifetime: 40 000 h (L-70)  
Beam angle: 2x120°  
3 years guarantee

### Applications

Indoor places,  
offices, hotels

### Features


Extruded Alu body  
Meets CE safety standards  
Protection rating: IP20  
Passive cooling

### Options



Dimm.: 1-10V, DALI  
Color temp.: 3000K, 5000K



Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 188	LT-UP ABBY 120/45W 840	3 460	>80	45	4 000	230 AC	3,3

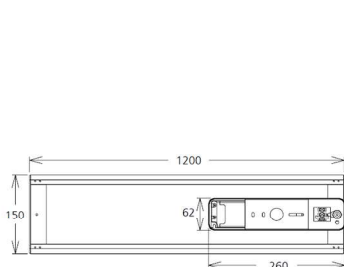

sizes

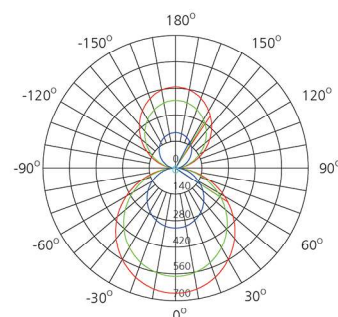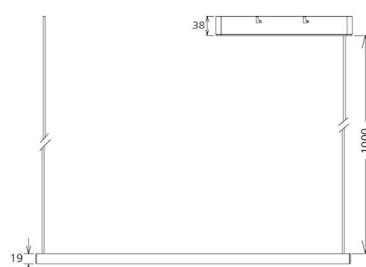

AVERAGE BEAM ANGLE (50%): 251.1DEG

UNIT: cd

- C0/180, 270.8 deg
- C30/210, 269.2 deg
- C60/240, 264.9 deg
- C90/270, 199.4 deg