

Lighting system

Optic: Opal diffusor
SMD LED
Lifetime: 50 000 h (L-70)
Beam angle: 100°
UGR<16

5 years guarantee



Applications


Indoor places,
shopping centers
malls, hotels




Features

Bended steel body
Meets CE safety standards
Protection rating: IP20
Passive cooling

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 266	LT-UP SQUARES-1 6060 840	3 445	>80	30	4 000	230 AC	2.9

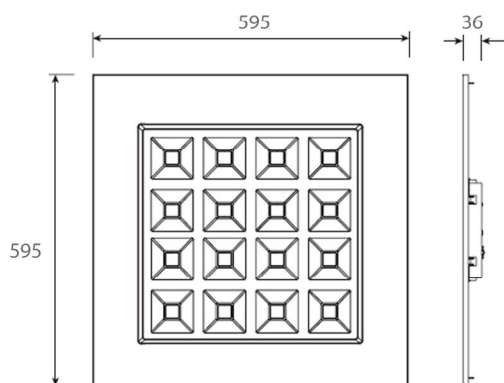

sizes

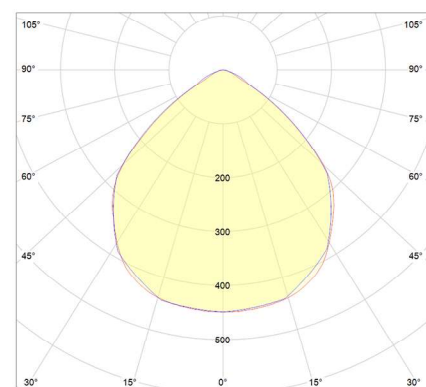

cd/klm: c0-180 c90-270