



### Lighting system


Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)  
Glare rating: UGR<19

### Applications

Indoor places,  
shopping centers,  
malls, hotels


### Features

Passive cooling  
Meets CE safety standards  
Protection rating: IP20

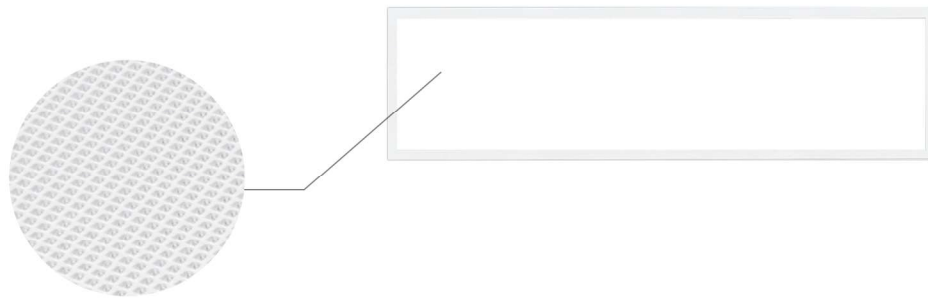


5 year warranty

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 250	LT-UP POLLY 30x120 830 UGR19	4 680	>80	36	4 000	230 AC	2,7

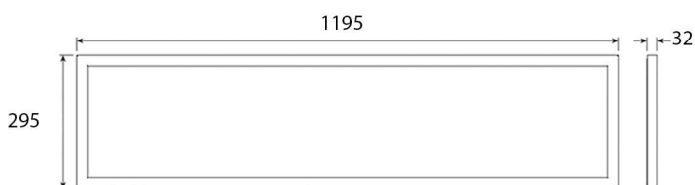

sizes

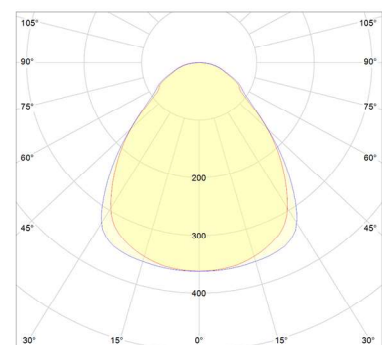

cd/klm: c0-180 c90-270