



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 120°

Applications

Indoor places,
Offices, schools,
Shopping malls



Features

Passive cooling
Meets CE safety standards
Protection rating: IP20



5 year warranty

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301251	LT-UP ROUNDY 60 930	3 600	>90	45	3 000	230 AC	4.4

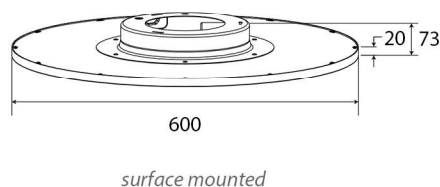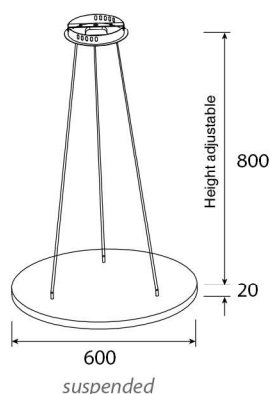

sizes

