



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 120°

Applications


Indoor places,
shopping centers
malls, hotels

Features


Injection-molded polymer body
Meets CE safety standards
Protection rating: IP40
Passive cooling

5 year guarantee

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 262	LT-UP SHINY-400 830	3 650	>80	40	3 000	230 AC	3.2

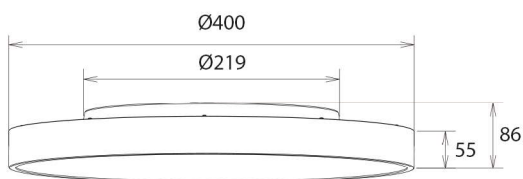

sizes

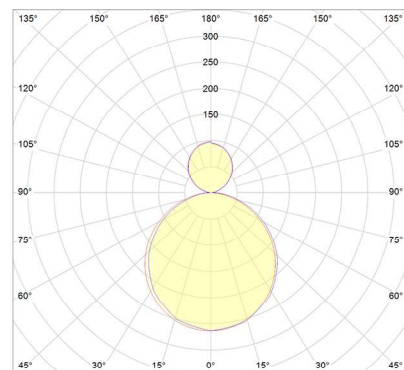

cd/klm: c0-180 c90-270