



Lighting system

Optic: Opal diffuser
Citizen COB LED
Lifetime: 50 000 h (L-70)
Beam angle: 36°
UGR<19

Applications

Indoor places,
shopping centers
malls, hotels



Features

Die-cast Alu body
Meets CE safety standards
Protection rating: IP20
Passive cooling
Cut out: Ø165-180mm


5 year warranty



| Ordering Code | Product Name | Light Output [lm] | CRI | System Power [W] | Color Temp. [K] | Power Supply [V] | Weight [Kg] |
|---------------|-----------------------|-------------------|-----|------------------|-----------------|------------------|-------------|
| 301 179 | LT-UP AVIOR4 1200 830 | 1 200 | >80 | 10 | 3 000 | 230 AC | 0.85 |

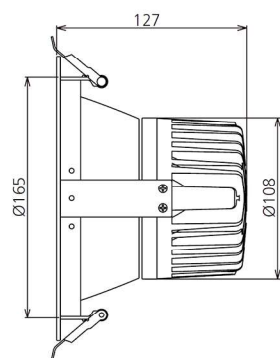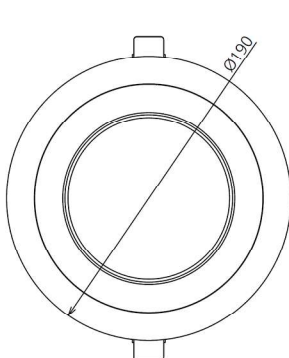

sizes

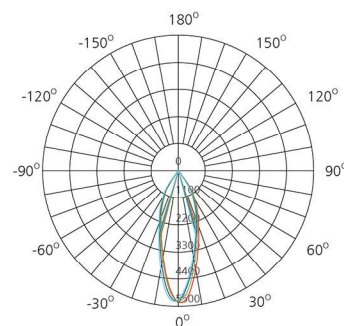

UNIT: cd

— C0/180, 33.4 deg
— C30/210, 33.1 deg
— C60/240, 33.0 deg
— C90/270, 32.9 deg

AVERAGE BEAM ANGLE (50%): 33.1DEG