



Lighting system
Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 120°


Applications

Indoor places,
Offices,
School lighting


Features

Passive cooling
Meets CE safety standards
Protection rating: IP20

5 year warranty

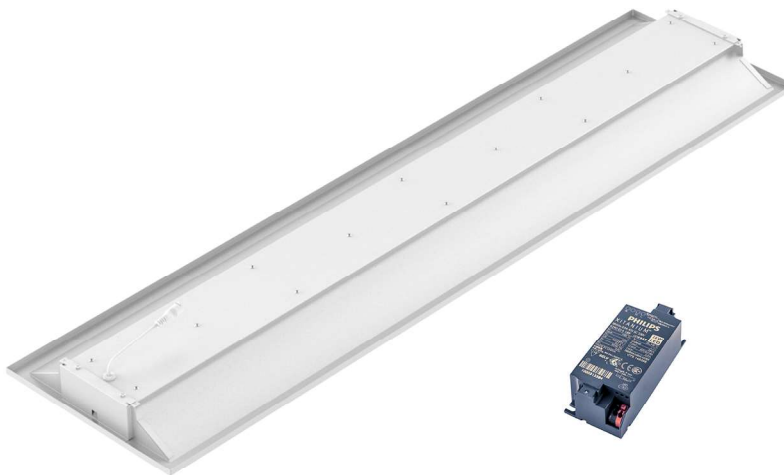


Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301234	LT-UP SCIMITAR-3 30x120 840	3 350	>80	30	4 000	230 AC	2.7

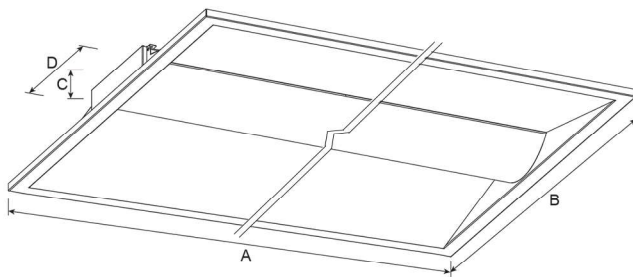

A [mm]	B [mm]	C [mm]	D [mm]
1195	295	54	107

sizes

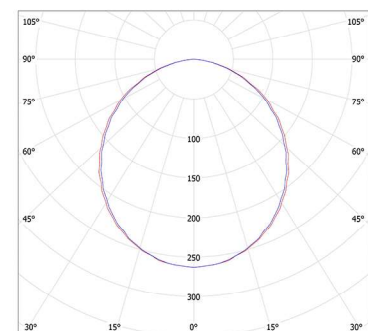

cd/klm: c0-180 c90-270