



### Lighting system

Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 40 000 h (L-70)  
Beam angle: 120°

### Applications

Indoor places,  
shopping centers  
malls, hotels


### Features

Injection-molded polymer body  
Meets CE safety standards  
Protection rating: IP54, IK10  
Passive cooling




3 year guarantee

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 260	LT-UP BREEZ 830	1 160	>80	12	3 000	230 AC	0.66

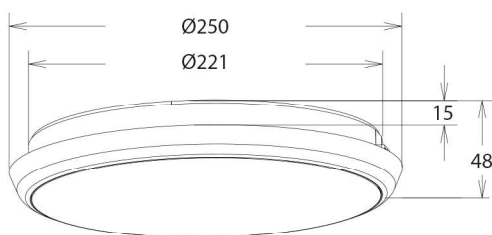

sizes

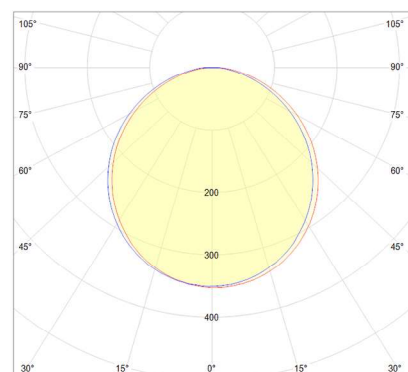

cd/klm: c0-180 c90-270