

# LT-UP SOU-SQUARE-300-P.S. 830

## Square LED surface mounted luminaire



### Lighting system

Optic: Opal diffusor  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)  
Beam angle: 120°

### Applications

Indoor places,  
shopping centers  
malls, hotels

### Features


Injection-molded polymer body  
Meets CE safety standards  
Protection rating: IP54, IK10  
Passive cooling




Microwave Sensor

5 year guarantee

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 261	LT-UP SOU-SQUARE 300-PS 830	1 850	>80	18	3 000	230 AC	0.66

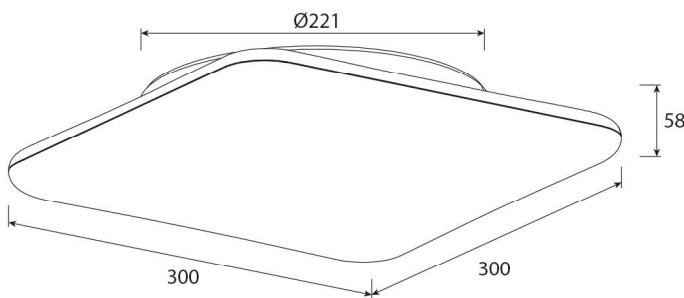

sizes

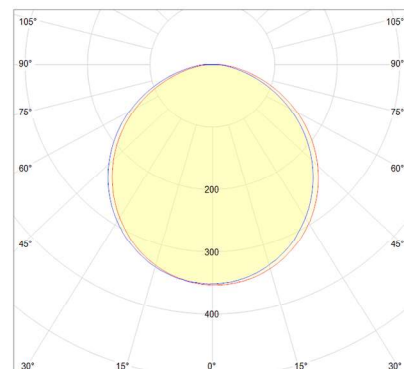

cd/klm: c0-180 c90-270