



Lighting system



Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 120°

Applications

Inside places,
Shopping malls,
Offices

Features

Passive cooling
Meets CE safety standards
Protection rating: IP20, IK08

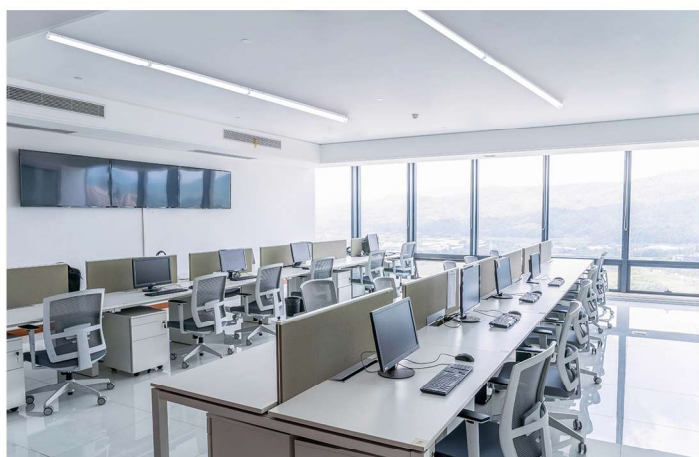

5 year warranty

Loopable

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301295	LT-UP BASY-120 840	4 000	>80	40	4 000	230 AC	1.28

