

Lighting system

Optic: Opal diffusor
Mid power LEDs
Lifetime: 50 000 h (L-70)
Beam angle: 110°

Applications

Inside places,
Shopping malls,
Offices


Features

Passive cooling
Loopable design
Meets CE safety standards
Protection rating: IP20


5 year warranty



Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301316	LT-CD OSAKA 830	2 500	>80	36	4 000	230 AC	1.5

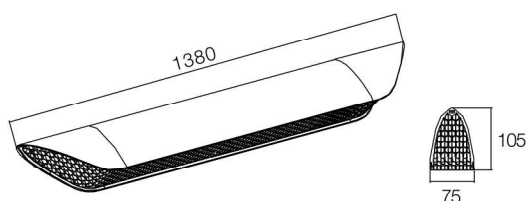

sizes

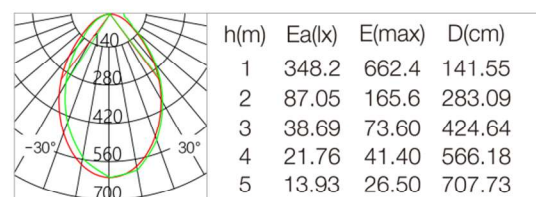

cd/klm: c0-180 c90-270