



### Options

Dimm: 1-10V, DALI  
Color temp.: 2700K, 3000K, 4000K,  
Emergency modul


**Lighting system**  
Optic: Opal PC diffusor  
and tempered glass  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)

### Applications


Indoor places,  
offices, hotel rooms,  
pools,bathrooms

### Features

Passive cooling  
Protection rating: IP65, IK08  
Meets CE safety standards  
Easy installation

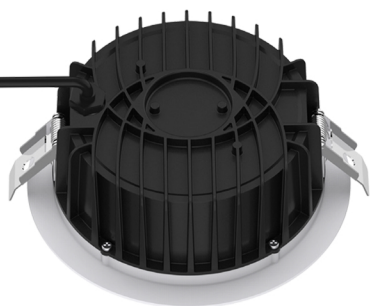

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Size A [mm]	Weight [Kg]
301348	LT-UP AVIUM 3/8 25W 830	2 250	>80	25	3 000	230 AC	235	1,27

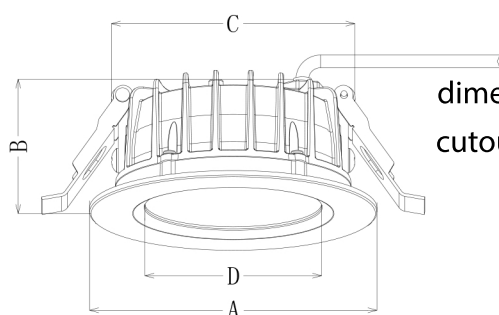

dimension: Ø235x81mm  
cutout: Ø200-220mm

A:235mm, B:81mm, C:196,1mm, D:169,

