




Options

Dimm: 1-10V, DALI
Color temp.: 3000K, 4000K, 5000K
Emergency modul

Lighting system

Optic: Opal PC diffusor
and tempered glass
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)

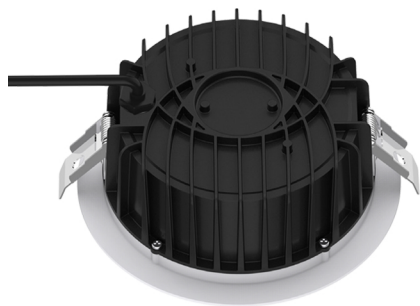


Applications

Indoor places,
offices, hotel rooms,
pools,bathrooms

Features


Passive cooling
Protection rating: IP65, IK08
Meets CE safety standards
Easy installation

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Size A [mm]	Weight [Kg]
301348	LT-UP AVIUM 3/8 25W 830	2 250	>80	25	3 000	230 AC	235	1,27
301349	LT-UP AVIUM 3/8 25W TD	2 250	>80	25	3 000	230 AC	235	1,27

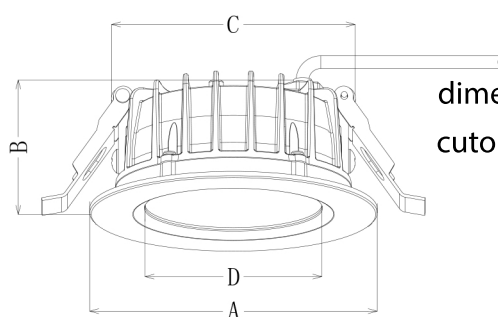

dimension: Ø235x81mm
cutout: Ø200-220mm

A:235mm, B:81mm, C:196,1mm, D:169,

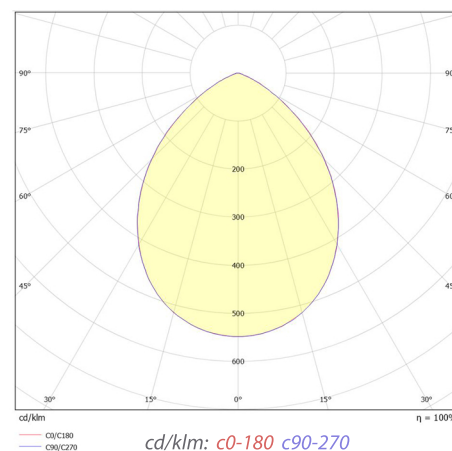

Technical detail, specifications and performance data are constantly changing. Current details should therefore be checked at www.luminotech.hu