




### Options

Dimm: 1-10V, DALI  
Color temp.: 3000K, 4000K, 5000K  
Emergency modul

### Lighting system

Optic: Opal PC diffusor  
and tempered glass  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)

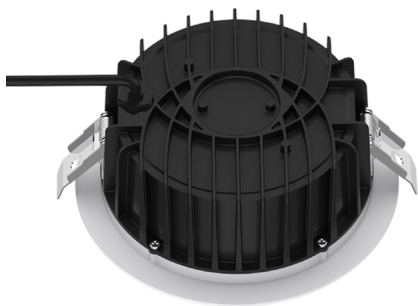


### Applications

Indoor places,  
offices, hotel rooms,  
pools,bathrooms

### Features


Passive cooling  
Protection rating: IP65, IK08  
Meets CE safety standards  
Easy installation

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Size A [mm]	Weight [Kg]
301 350	LT-UP AVIUM 3/6 18W TD	1 650	>80	18	3 000	230 AC	172	0,79
301 351	LT-UP AVIUM 3/6 18W 830	1 650	>80	18	3 000	230 AC	172	0,79

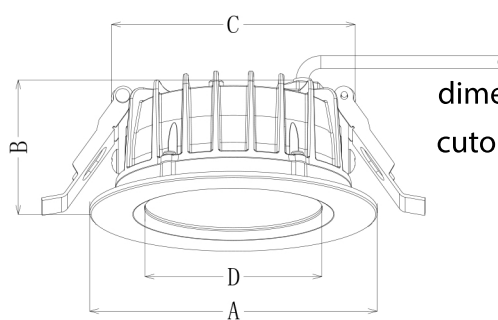

dimension: Ø172x69mm  
cutout: Ø150-165mm

A:172mm, B:69mm, C:146,6mm, D:120,4

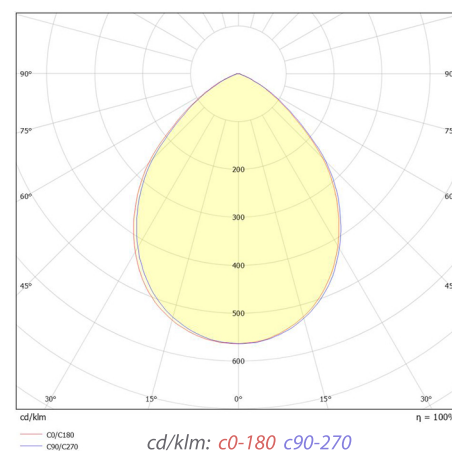

Technical detail, specifications and performance data are constantly changing. Current details should therefore be checked at [www.luminotech.hu](http://www.luminotech.hu)