

LT-SOL Quadra Light 60x60

Recessed luminaire



Lighting system

Optic: opal diffusor

Lightsource: LED chips

Lifetime: 50 000 h (L-70)



Features

Meets CE safety standards

Easy mounting system

Blended steel body


Protection rating: IP20, IK02

Passive cooling

Applications

Indoor places, offices,
meeting rooms

Ordering code	Source Flux [lm]	CRI	System Power [W]	Color Temp. [K]	Dimming	Power Supply [V]	Weight [kg]
301 016	5 200	>80	32,5	4 000	-	230 AC	4,5
301 031	4 700	>80	32,5	3 000	-	230 AC	4,5

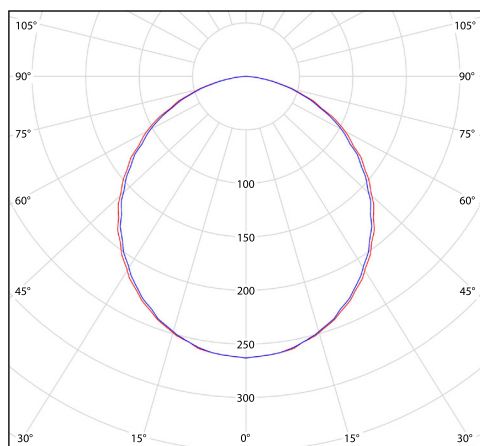

cd/klm
— C0-180 — C90-270

