



Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 40 000 h (L-70)

Applications

Indoor places, offices,
shopping centers
malls, hotels


Features

Passive cooling
Meets CE safety standards
Polimer body
Protection rating: IP20


Options

Triac dimming,
Color temp.: 5000K, 5700K

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 044	LT-SOL AVI S 830	840	>80	10	3 000	230 AC	0,25
301 043	LT-SOL AVI S 840	920	>80	10	4 000	230 AC	0,25
301 030	LT-SOL AVI M 830	1 000	>80	13	3 000	230 AC	0,34
301 038	LT-SOL AVI M 840	1 100	>80	13	4 000	230 AC	0,34
301 045	LT-SOL AVI L 830	1 400	>80	16	3 000	230 AC	0,51
301 047	LT-SOL AVI L 840	1 550	>80	16	4 000	230 AC	0,51
301 046	LT-SOL AVI XL 830	1 700	>80	20	3 000	230 AC	0,63
301 048	LT-SOL AVI XL 840	1 840	>80	20	4 000	230 AC	0,63

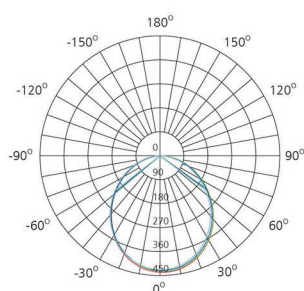

cd/klm: c0-180 c90-270

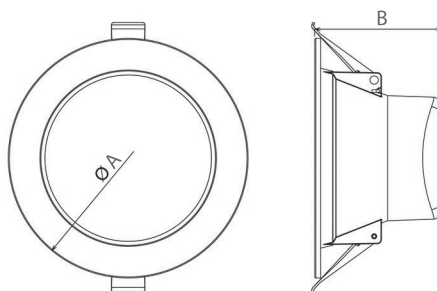

sizes

Ordering Code	AxB [mm]	Cut out [mm]
301 044	Ø115x61	Ø90-100
301 043	Ø115x61	Ø90-100
301 030	Ø145x61	Ø110-120
301 038	Ø145x61	Ø110-120
301 045	Ø190x74	Ø150-160
301 047	Ø190x74	Ø150-160
301 046	Ø225x84	Ø180-190
301 048	Ø225x84	Ø180-190