



Lighting system
Optic: Osram LED panel
Lifetime: 50 000 h (L-70)
Dark-light Alu reflector 50°

Features
Easy mounting system
Passive cooling
Meets CE safety standards
Die-cast Alu body
Protection rating: IP54




Applications

Indoor places, airports, shopping centers, malls, hotels


Options

Dim: DALI, 1-10V
Driver: Philips

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
ARD-90-840	LT-SOL ARDON 9000	9 130	>80	78	4 000	230 AC	3,1
ARD-12-840	LT-SOL ARDON 1200	12 210	>80	105	4 000	230 AC	3,1

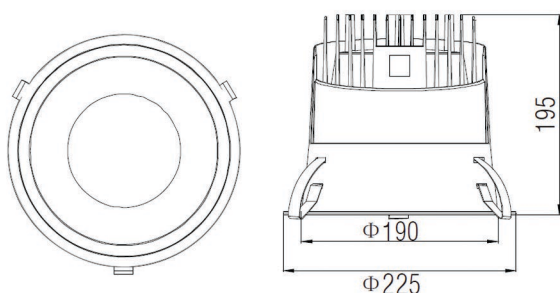

sizes

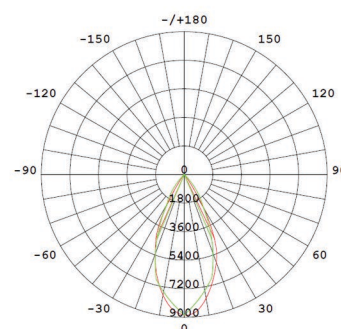

cd/klm: c0-180 c90-270