



### Lighting system

Optic: Polimer lens  
Mid power SMD LEDs  
Lifetime: 50 000 h (L-70)

### Applications

Indoor places, parking areas,  
industrial areas, malls


### Features

Passive cooling  
Meets CE safety standards  
Extruded polymer body  
Protection rating: IP66


### Options

Color temp.: 5000K , 5700K

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	"A" Size [mm]	Weight [Kg]
301 105	LT-SOL OISER-20-830	2 100	>80	20	3 000	230 AC	700	0,6
301 106	LT-SOL OISER-20-840	2 300	>80	20	4 000	230 AC	700	0,6
301 107	LT-SOL OISER-30-830	3 090	>80	30	3 000	230 AC	1 300	0,8
301 108	LT-SOL OISER-30-840	3 420	>80	30	4 000	230 AC	1 300	0,8
301 109	LT-SOL OISER-50-830	5 400	>80	50	3 000	230 AC	1 600	1
301 110	LT-SOL OISER-50-840	6 000	>80	50	4 000	230 AC	1 600	1

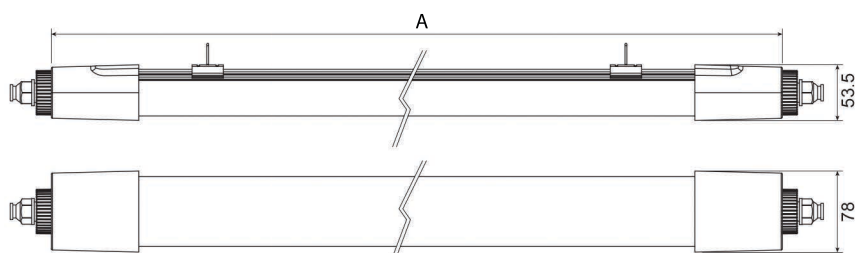

sizes

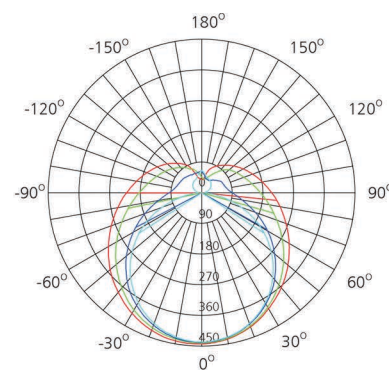

cd/klm: c0-180 c90-270