

Lighting system

Optic: Opal diffusor
Mid power SMD LEDs
Lifetime: 50 000 h (L-70)

Applications

Outdoor places, flood lighting,
building walls, board lighting


Features

Passive cooling
Meets CE safety standards
Die-cat alu body
Protection rating: IP65
Sizes: 321x274x103mm

Options

Dimm: DALI, 1-10V
CRI >80

Ordering Code	Product Name	Light Output [lm]	CRI	System Power [W]	Color Temp. [K]	Power Supply [V]	Weight [Kg]
301 169	LT-AG- Floody 200W-750	23 000	>70	200	5 000	230 AC	3,7

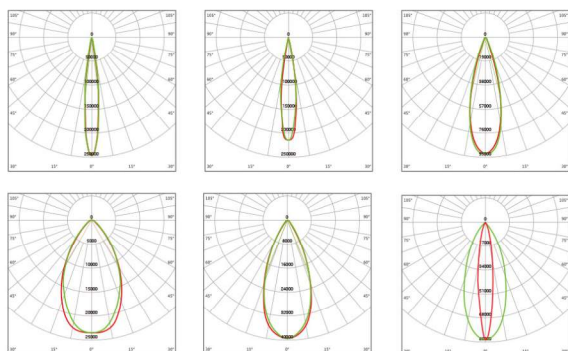

photometric diagrams

